

### **FACULTY OF ENGINEERING**

### TEXTILE AND GINNING ENGINEERING DAPARTMENT

# THE SUITABILITY OF UGANDAN MUSA SAPIENTUM BANANA PLANT SPECIES FOR TEXTILE FIBRE PRODUCTION

DATE:

STUDENT NAME: KASHEMERE DAMARI

REG No: BU/UG/2009/75

kashtdaimal@gmail.com

A Project Report submitted to the Department of Textile and Ginning Engineering for the award of a Bachelor of Science Degree in Textile Engineering of Busitema University

### **DECLARATION**

I **Damari Kashemere** do declare to the best of my knowledge that I did this Final Year Project in partial fulfillment of the requirements for the award of a Bachelor of Science in Textile Engineering of Busitema University and that the work here is solely of my own effort, except where reference has been appended. It is in no case a reproduction of any other work.

Kine	28th MAT , 2013	
Signature	Date	

BUSITEMA UNIVERSITY LIBRARY
CLASS No.: 677, 7072 KAS
ACCESS NO.: FEFOCES

## **APPROVAL**

This report has been submitted for examination with approval from the following supervisors:

MR.: RWAWIIRE SAMSON
Signature,
Date
ENG. WANDERA WAFULA JOHNNIE
Signature
Date

### ACKNOWLEDGEMENTS

Writing this report at some point seemed like I would never get through. However, with persistence and keen focus, it is finally complete. I want to acknowledge everyone who participated for their help and support, without which this report would not have been finished.

The first is God whose guidance, love, and grace has seen me through writing as well as the publication of this report as a successful venture.

I am also indebted to my supervisors ENG. Rwawiire Samson (The Head of department Textile and Ginning Engineering, Busitema University) and ENG. Wandera Wafula Johnnie (The team leader MSI, Busitema University) for their valuable guidance and expert advice may the Almighty God reward your efforts.

Last but not least, a special cheer for all my fellow students for their enthusiasm, love and encouragement

I wish you success in the struggle to liberate your selves from ignorance, poverty and disease, and may the good Lord richly reward you with success.

## **DEDICATION**

I dedicate this report to my dear Dad and Mum whose sacrifice has seen me into the world of engineering.

# LIST OF TABLES

TABLE 1: THE CHEMICAL COMPOSITION OF PSEUDOSTEM FIBERS
Table 2: Tensile test results for untreated fibre
TABLE 3: TEST RESULTS FOR FIBRE SCOURED AT 2 GPL SOLUTION OF NAOH FOR 30 MINUTES 24
Table 4: Test results for fibre Scoured at 2 GPL solution of NaOH for 60minutes 25
TABLE 5: TEST RESULTS FOR FIBRE SCOURED WITH ASH WATER FOR 30 MINUTES
TABLE 6: Test results for the fibre scoured with ash water for 60minutes
TABLE 7: EFFECT OF THE ALKALI TREATMENT ON THE MECHANICAL FIBRES PROPERTIES29
Table 8: comparison of untreated fibres and fibre treated for 30minutes30

# LIST OF FIGURES

FIGURE 1: ENERGY FOR PRODUCTION OF SOME OF THE NATURAL FIBRES AND CARBON FIBRE1
FIGURE 2: 2008 GLOBAL FIBRE PRODUCTION: 69MILLION METRIC TONS
FIGURE 3: A HEAP OF DISPOSED OFF BANANA PSEUDOSTEMS
FIGURE 4: REMOVING THE OUTSIDE PSEUDOSTEM LAYERS, FIG. 5: FRESH STRIPS READY TO BE 14
FIGURE 6: THE FIBRE EXTRACTION PROCESS FIGURE 7: EXTRACTED BANANA FIBRE
FIGURE 8: SCOURED FIBRE
FIGURE 9: THE BLEACHING PROCESS FIGURE 10: BLEACHED FIBRE WASHING
FIGURE 11: DRYING OF BLEACHED FIBRE
FIGURE 12: The single end tensile tester
FIGURE 13: SEM MICROGRAPH OF MUSA SAPIENTUM UNTREATED BANANA FIBRE22
FIGURE 14: STRESS-STRAIN CURVES OF UNTREATED AND TREATED BANANA FIRRE 28

### **ACRONYMS**

Ha hectare(s)

Kg kilogram(s)

FAO Food and Agriculture Organization of the United Nations

ASTM American Society for Testing and Materials

w/v weight on volume

w/w weight on weight

SEM scanning electron microscopy

GPL grams per litre

Sd standard deviation

SE standard error

 $C_{\nu}$  Coefficient of variation

OH Hydroxyl

COOH Carboxyl

#### ABSTRACT

Banana stem has no use after harvesting the fruit; there is a huge generation of waste as a consequence of the plant life-cycle, because pseudostems, hangers and leaves are not economically used. Therefore this study was carried out to analyse the suitability of Ugandan *Musa Sapientum* banana species for the production of textile fibre. The fibre was extracted from the banana pseudostem by hand, morphological characterization of fibres was done, the fibre was scoured using an alkali (NaOH and ash water) and then bleached using hydrogen peroxide. Scouring was done at different NaOH concentrations and ash water at different timings of 30, 60 and 90minutes respectively. Fibre tensile property testing was done before and after fibre treatment. The fibre morphological properties were analysed before any fibre treatment was done.

Generally Musa Sapientum was found to have very robust fibres that could be used in various textile applications as industrial textiles, consumer textiles, furnishing textiles among others.

Musa Sapientum fibre treatment using alkali increases its tensile strength and young's modulus and has got less effect on fibre elongation. Morphological characterisation showed that treated fibres' surface was rougher than that of untreated fibres.

From the results, the optimum scouring conditions for Musa Sapientum fibre scouring is using 2g/L of NaOH or ash water of PH 10 for one hour; however ash water treatment gives stronger fibres with higher modulus of elasticity. High figure of young's modulus signifies fibre stiffness.

Key words; Musa Sapientum fibre, optimisation, mechanical and physical properties, textile application

2,8.2 The boiling of banana fibres in ash water	13
CHAPTER THREE: METHODS AND MATERIALS	14
3.1 Raw materials	14
3.2 Fiber extraction	14
3.3 Fibre treatment	15
3.3.1 Scouring	
3.3.2 Bleaching	16
3.4 Determination of fibre properties	17
3.4.1 Fibre mechanical properties	18
3.4.2Fibre morphological property anlysis	79
CHAPTER FOUR: RESULTS, ANALYSIS AND DISCUSSIONS	21
4.1 Fibre morphological properties	<b>2</b> 1
4.2 Fibre mechanical properties	21
4.2.1 Effect of the alkali treatment on the mechanical fibres properties	28
4.2.2 Comparison of treated fibres with untreated fibres	29
CHAPTER FIVE: CONCLUSIONS AND RECOMMENDATIONS	
5.1 Conclusions	32
5.2 Recommendations	32
REFERENCES	34
APPENDICES	, ia

#### **CHAPTER ONE: INTRODUCTION**

### 1.1 Background

Bananas occupy the largest cultivated area among staple food crops in Uganda and are primarily grown on small subsistence farms (plots of less than 0.5 ha). In general, the Great Lakes region covering parts of Uganda, Rwanda, Burundi, Tanzania, Kenya and DRC is the largest producer and consumer of bananas in Africa (Smale, 2006) where per capita consumption has been estimated at more than 250kg; the highest in the world (FAO, 1985). Specifically, Uganda ranks second after India in the world banana production with an annual output of 9.84 million tones accounting for 11.18% of the world's total production (INIBAP, 1999). The area under banana production is 1.3 million hectares and this constitutes 75% of arable land (NARO, 2000).

In recent years, the search for alternative sources of fibers has been increasing due to the continuous reduction of cotton yields, the main textile fibre in Uganda and other countries. There have been many solutions to this problem; like substitution with the manmade fibres, extraction from other natural fiber producing plants which has tried to overcome the shortage. Synthetic fibres/manmade fibres have proved to take up the biggest percentage in the problem solving (see figure 2), however these fibres are not eco-friendly because of their non-biodegradable nature which has raised much environmental concern. More so these synthetics are not recyclable and their manufacturing process is not an easy venture due to the large quantum of energy needed during their production process (for example; figure 1)

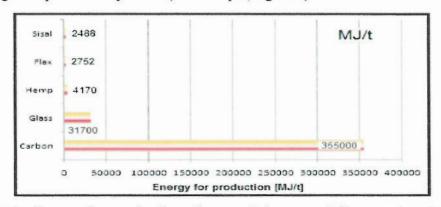


Figure 1: Energy for production of some of the natural fibres and carbon fibre (Sources: SachsenLeinen; Daimler 1999; BAFA; NOVA; AVB; CELC; REO)